



HTL Low Profile Torque Wrench Attachment

The HTL Low Profile Torque Wrench Attachment is part of HTL's innovative 3-in-1 Hydraulic Torque Wrench range and works with HTL's range of 'W' Low Profile Hydraulic Torque Wrenches.

Due to its innovative design and the high quality materials used, this is extremely durable and easy to operate. With hex sizes available from 3/4" to 6 1/8" AF, 19mm to 155mm AF and torque range from 255 to 31, 800 ft.lb, 346 to 43,100 Nm the HTL Low Profile Torque Wrench Attachment is suitable for a wide range of applications where clearance is limited.

Interchangeable & Cross Compatible Design

The design ensures that the operator can interchange ratchet links with many other well-known brands (specifically Hystorc, Rapid-Torc and Atlas Copco).

Features and Benefits


- ✓ Fully interchangeable with many other well-known brands (Hystorc, Rapid-Torc and Atlas Copco)
- ✓ Made in the UK
- ✓ Calibrated and accurate to +/- 3%
- ✓ Only 3 moving parts for reliability and maintenance
- ✓ Hex sizes available from 3/4" to 6 1/8" AF, 19mm to 155mm AF
- ✓ Non-standard link sizes available



*Complete tool shown is HTL-W Torque Wrench with HTL-L Low Profile Attachment

Technical Information

Model		HTL-L2	HTL-L4	HTL-L8	HTL-L14	HTL-L30
Torque Wrench		HTL-W2	HTL-W4	HTL-W8	HTL-W14	HTL-W30
Min Torque	lb.ft	255	580	1143	2010	4770
	Nm	346	786	1549	2725	6466
Max Torque	lb.ft	1710	3855	8151	13400	31800
	Nm	2318	5226	11049	18165	43100
Weight	Kg	0.93	1.86	3.22	5.12	11.28
A	mm	183	248	308	372	406
	Inch	7.2	9.8	12.1	14.6	16.0
B	mm	24-70	36-80	50-105	55-120	70-155
	Inch	$\frac{3}{4}'' - 2 \frac{3}{4}''$	$\frac{7}{8}'' - 3 \frac{1}{8}''$	$1 \frac{3}{4}'' - 4 \frac{1}{8}''$	$2'' - 4 \frac{5}{8}''$	$3 \frac{9}{16}'' - 6 \frac{1}{8}''$
C	mm	9	12	15	18.5	22
	Inch	0.4	0.5	0.6	0.7	0.9
D	mm	31.5	42	52.6	64	85
	Inch	1.2	1.7	2.1	2.5	3.3
E	mm	45	60	80	90	131
	Inch	1.7	2.4	3.1	3.5	5.2

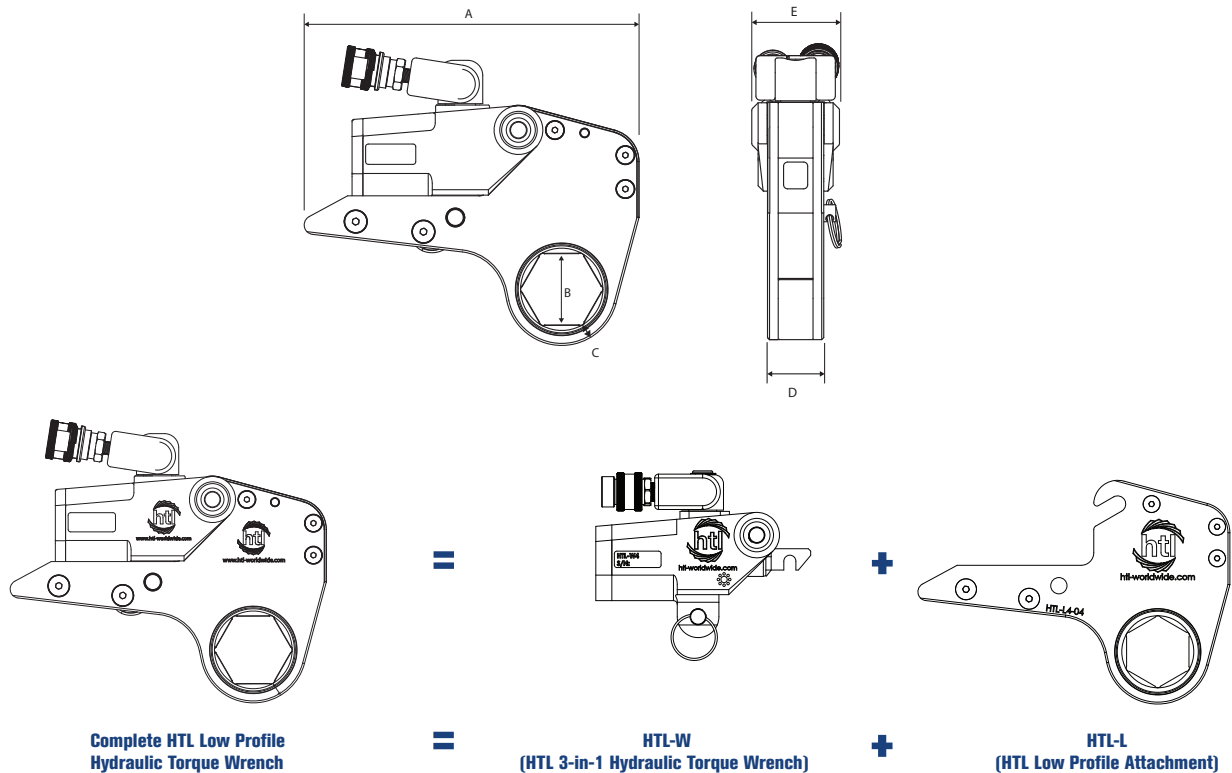

PLEASE NOTE: Figures provided are for guidance only, please refer to individual tool charts. All data is given in good faith and without acceptance of responsibility on the part of HTL.

INDUSTRY LEADERS IN CONTROLLED BOLTING, FLANGE WORKING AND PORTABLE MACHINE SOLUTIONS



HTL Australasia Pty Ltd
466 Victoria Road
Malaga, WA 6090
Western Australia

Telephone: +61 (0) 8 9249 3980
Email: info@htl-australasia.com
Visit: www.htl-australasia.com

